Energy products

Gas metering valve

C421735

Two-inch flange, electro-hydraulic servo actuated (EHA)



Meggitt's two-inch right angle, plug style gas metering valve is designed for use on large frame industrial gas turbine engines. This product includes high pressure recovery trim with exceptional position control.

Specifications

Function: Precision fuel gas metering for large frame turbine engine control, fail-safe closed

10.94" wide, 10.8" deep, 27.1" long Physical size:

Weight: 57 pounds (estimated, dry)

2" ANSI B16.5 CL 300 raised face flanges Flange type:

Trim size: 1 inch

0 to 700 psia Line pressure:

Actuation pressure (hydraulic fluid):

1016 to 1160 psig, 2 gpm maximum flow, 10 to 200°F

-65 to 300°F Fluid temperature: Ambient temperature: -65 to 250°F

Performance:

300 to 22,000 pounds/hour, natural gas

Pressure drop: 16 psid at 450 psia, 300°F, 15,000 pounds/hour, fully open

Internal leakage: ANSI/FC170-2, class IV

Operating time: 500 msec opening or closing, 200 msec trip time

Electrical:

Servo valve: 3 coils, 80 ma/coil for maximum flow

LVDT: Excitation, 7.07 (±0.14) volts rms, 3000 (±300) Hz

Variations: Outlet orientation direction optional

Key features

- Accuracy, ±3% of flow point
- Hydraulic servo valve position control
- For use on both DLE and SAC turbine engines
- Explosion proof design
- All stainless steel valve and yoke materials for NACE compliance
- No maintenance required under normal conditions


Meggitt Control Systems



Energy products

Gas metering valve

C421735

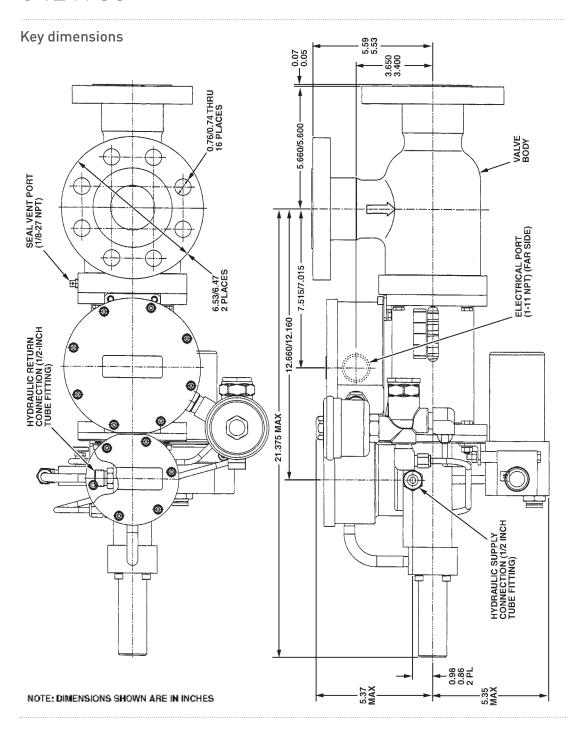

Contact

Meggitt Controls

12838 Saticoy St North Hollywood California 91605-3505 USA

Telephone: (818) 765-8160 FAX: (818) 759-2194

www.meggitt.com

Meggitt Control Systems

